

# TOTO®

# MS874114SG/MS874114S

## Carlyle One Piece Toilet, 1.6 GPF




MS874114SG - Carlyle Toilet with SanaGloss and SoftClose Seat




**G-Max Technology:** Quiet, powerful, commercial grade flushing performance.



**UniFit Rough-in:** Easy to install, 10", 12" and 14" rough-in's available.

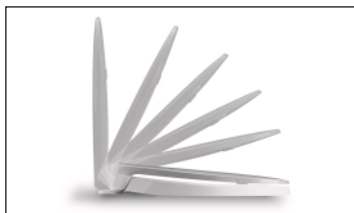

Complete with SoftClose seat, or upgrade to a Washlet®.

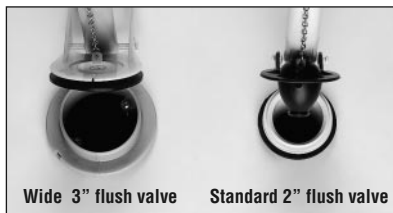

**Fast Flush:** New, wider 3" flush valve is 125% larger than conventional 2" flush valves.

- Streamlined, high profile one piece design
- Skirted styling with concealed trapway for easy cleaning.
- UniFit Rough-in
- Sanagloss Technology: super smooth, ion barrier glazing for a clean toilet bowl
- G-Max Technology
- Powerful, quiet flush every time
- Large water surface

Stylish, high profile one piece toilet with 12" UniFit rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome trip lever, mounting covers and SoftClose seat included.

### ■ MS874114SG

Elongated with SoftClose seat. 12" UniFit rough-in. SanaGloss Glazing. Available Colors: #01, #11, #12, #03.

### ■ MS874114S

Elongated with SoftClose seat. 12" UniFit rough-in. Less SanaGloss Glazing. Available Colors: #04, #51.

### □ TSU01W.10

10" UniFit rough-in: Optional.

### □ TSU01W.12

12" UniFit rough-in: Supplied.

### □ TSU01W.14

14" UniFit rough-in: Optional.

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Trip Lever:

Standard Chrome

Optional See price book for additional finishes

**Augusta Decorative Collection**

# MS874114SG /MS874114S

## Carlyle One Piece Toilet, 1.6 GPF

### ■ PERFORMANCE

The TOTO G-Max low consumption toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf  
 Flush System: Gravity Feed (G-Max system)  
 Min. Water Pressure: 8 psi  
 Water Surface: 10" x 8-1/4"  
 Trap Diameter: 2-1/16"  
 Rough-in: 12" (10" / 14" optional)  
 Trap Seal: 2-5/8"  
 Warranty: Five Year Limited Warranty  
 Material: Tank & Bowl: Vitreous china  
 UniFit Rough-in: PVC

Shipping Weight: **MS874114SG** 108 lbs.  
**MS874114S** 108 lbs.


Shipping Dimension: **MS874114SG/MS874114S**  
 31-1/8"L x 18-1/8"W x 27-1/8"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*

*Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others*

*These dimensions and specifications are subject to change without notice.*

U.S. Patent: 5,819,326  
 5,983,413 and pending  
 6,108,826

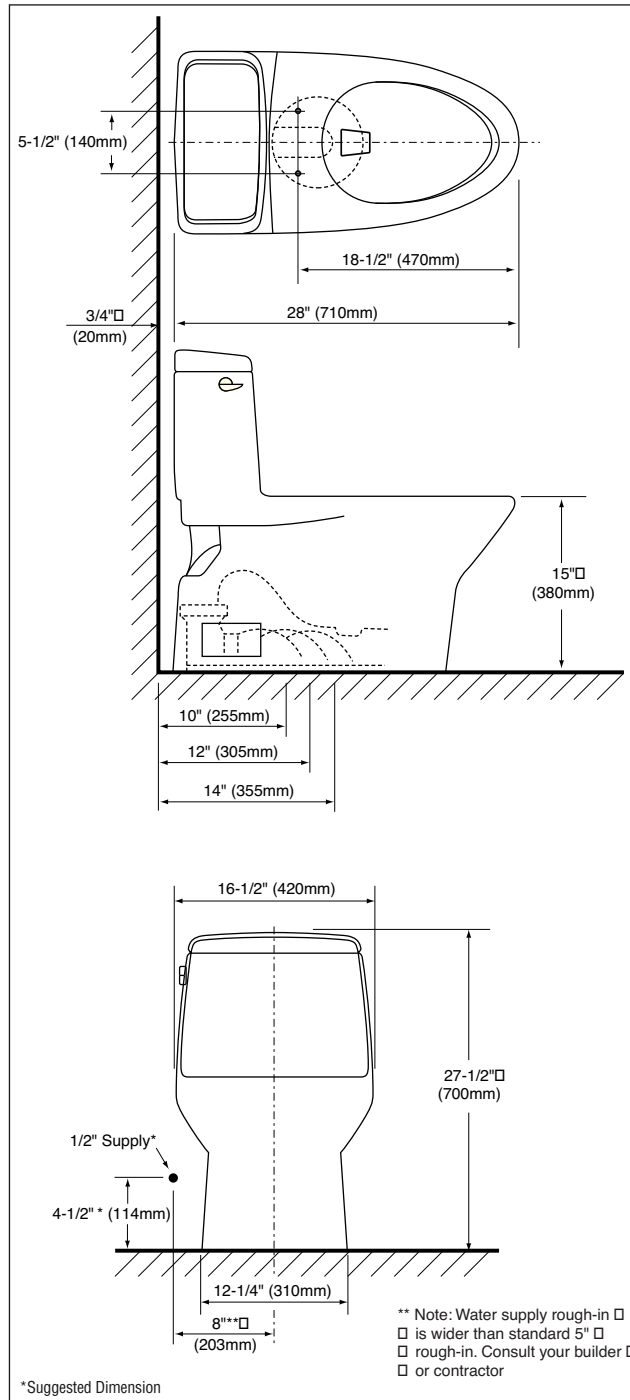

MS874114SG/MS874114S - Carlyle Toilet



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com  
 Printed in U.S.A. © TOTO LTD. 2/01

Printed on recycled paper

REV 2/01